


Screwed “Barrel Type” Spring Check Valve

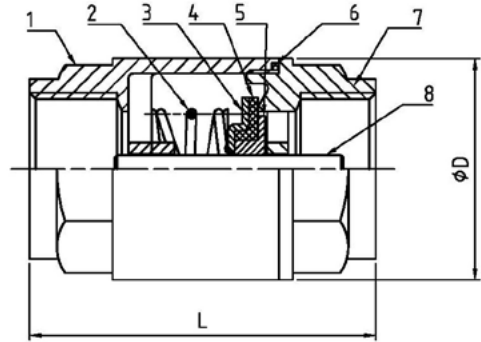

- ASTM A351 CF8M 316 Stainless Steel construction with Chemically Polished finish.
- 2-Pce screw together body construction.
- PTFE Body Seal, Viton Seat.
- 20 bar pressure rated.
- -20 / +150 deg C Temp rated.
- BSP Screwed end connections.
- CE marked in accordance with PED 2014/68/EU (from 1.1/4")

Item	Part	Material	Qty.
1	Body	CF8M	1
2	Spring	304	1
3	Disc	304	1
4	Seat	FKM	1
5	Core	316	1
6	Gasket	PTFE	1
7	Cap	CF8M	1
8	Stem	316	1

The “NTC” Spring Check Valve is unique to G.C.Supplies UK Ltd. The valve is manufactured to our own design specifications and using our own tooling.

The valve offers substantial advantages over other spring check valves available on the market.

We are able to offer full material certification.

Sizes 1.1/4” - 2” are CE marked in accordance with the PED.

The 2-pce body construction allows the valve to be maintained. 20 bar/g pressure rating.

We are also able to offer this unit as a Double Check with centre Bleed Port.

SIZE	L	D
1/4”	51	29
3/8”	51	29
1/2”	57	32.5
3/4”	62	40.5
1”	75	48
1-1/4”	82	60
1-1/2”	88	70
2”	100	87

